

# POWERCORE® SILO VENTING COLLECTORS

**SVU SERIES** 



## **SMALLER. SMARTER SILO** VENTING FILTERS

### THE COMPACT SVU SERIES BRINGS THE PERFORMANCE AND CONVENIENCE OF THE POWERCORE® TECHNOLOGY TO THE SILO VENTING MARKET.


Built to withstand severe weather conditions. the SVU series is specially designed for use on pneumatically filled storage silos with airflows up to 1175 cfm (2000 m<sup>3</sup>/hr).

The PowerCore SVU Series will satisfy the need not only for efficiency and reduced maintenance, but also for convenience and workers' safety. You can't always avoid having your maintenance workers climbing and working on high height silos, but you can control how convenient and safe it is. The SVU's compact and low design provides easy and safe access to the filter packs.

With the Silo Venting Unit, you can save space, reduce maintenance requirements and hazards generated by changing long and dirty filter bags or cartridges on a silo top. Thanks to the PowerCore technology, while up to 6 filter bags have to be moved up and down on conventional silo venting solutions, the SVU only needs 2 compact and lightweight filter packs; Changing the PowerCore filter packs can be done easily and safely by just one person with no tools or losable part, in no time.

Time-consuming and often very dirty maintenance processes, frequently under precarious working conditions, are a thing of the past when using the PowerCore SVU Series.

> THAN TRADITIONAL SILO VENTING COLLECTORS

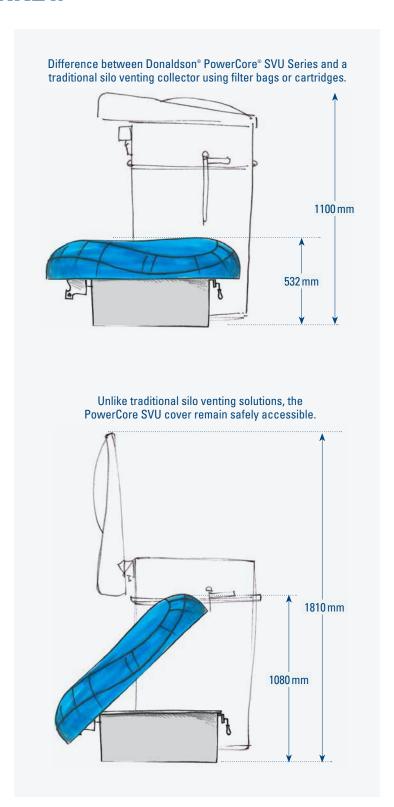

### **CHANGING EXPECTATIONS**

The performance, reliability, and ergonomy of the SVU is derived from a combination of advanced filtration technology, unique form factors and high performance reverse jet cleaning to ensure effective dust release and a continuous level of operation for longer. Fewer filters, better cleaning, and shorter maintenance leads to major cost savings over the life of the collector.



### **DESIGNED WITH SAFETY IN MIND**

- Compact, low height design for easy and safe filter access and maintenance
- Up to 54% shorter than conventional venting units (532 mm)
- Safe cover operations due to its low height



### **ROBUST AND WEATHER PROOF**

- Robust Stainless Steel Body
- · Controller, diaphram valves, and pressure switch are safely protected under the weather hood
- Integrated mounting Flange



### **EASY INSTALLATION**

- Fully assembled
- · Removable lifting hooks
- Pre set controller
- Mounting Flange DN800mm



### **EFFECTIVE FILTER CLEANING**

- Reverse pulse jet cleaning
- Effective dust dislodging
- · No filters bridging risks



### **FAST & CONVENIENT MAINTENANCE**

- Low profile for easy access
- Top-removal filters packs
- No tools required
- Hood fitted with twin gas struts for easy open and close



### POWERCORE® WITH ULTRA-WEB® TECHNOLOGY

- High efficiency (78% fewer emissions)
- Long filter life
- Enhanced filtration performance 2 PowerCore® CP packs replace up to 6 traditional bags





## **POWERED BY POWERCORE®**

At the core of the SVU unique design is PowerCore the most innovative filtration technology from Donaldson is integral to the dramatic downsizing of the PowerCore SVU series.

An entirely new approach to dust collectors, the PowerCore filter pack is small, lightweight, and easily handled by one person.

Donaldson's PowerCore technology combined to our well-proven Ultra-Web advanced fine fiber technology allows more effective filter area to be packaged in a smaller space:

Pneumatic Silo Venting applications typically requiring up to 6 filter bags (24 m²) in the past now only needs 2 PowerCore compact filter packs. With more media packed into a smaller space and a simplified airflow path, PowerCore filter packs provide high performance with a low pressure drop.

### **POWERCORE® SVU SERIES**

- · High performance in a smaller package
- · Extended maintenance intervals
- Fast, safe & easy maintenance
- Lower shipping, installation and maintenance costs
- Technology proven in field applications for more than 10 years






POWERCORE FILTER PACKS

replaces
up to
FILTER BAGS



## **ADVANCED FILTRATION TECHNOLOGY**

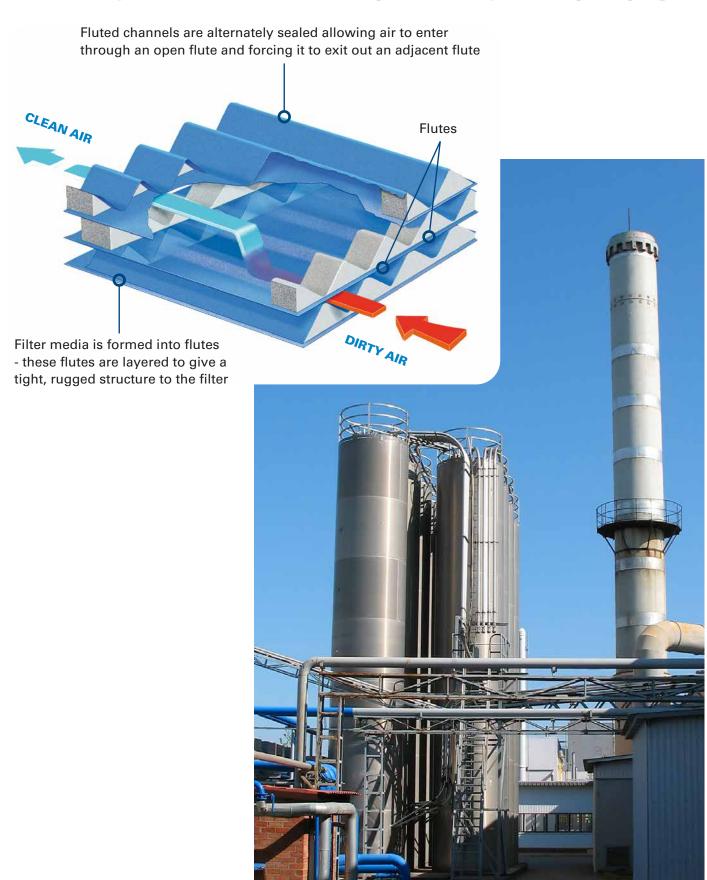

## **SPECIFICATIONS**

CASING		
Max. height above silo	When closed: 532 mm When open: 1,080 mm	
Plan	1,150 mm x 935 mm	
Mounting Flange	DN 800 mm	
Weight	65 kg	
Design Pressure	± 5,000Pa	
Colour	Cover: Blue Body: Stainless Steel	
Outdoor, weather protection	UV protection	
Dirty side contact parts	Stainless steel	
Construction	Welded and bolted assembly	



### Nominal airflow 177 cfm / 2,000 m³/hr **Emission level** $<5 \,\mathrm{mg/m^3}$ Noise Level <80 dB(A) (ISO 3744) -10° to + 60°C Temperature specification


Туре	Reverse pulse jet	
Compressed air pressure	6 bar (max)	
Compressed air consumption	22 NI per pulse	
Compressed air quality	Class 3 (ISO 8573-1)	
Integrated controller	STR2 – Cycle timer	
Input voltage	230/115VAC	

**CLEANING SYSTEM** 

FILTERS ELEMENTS		
Filters elements	PowerCore® CP	
Number of elements	2	
Filter pack dimensions	L 569 x W 193 x H 178 mm	



## **DIMENSIONS**

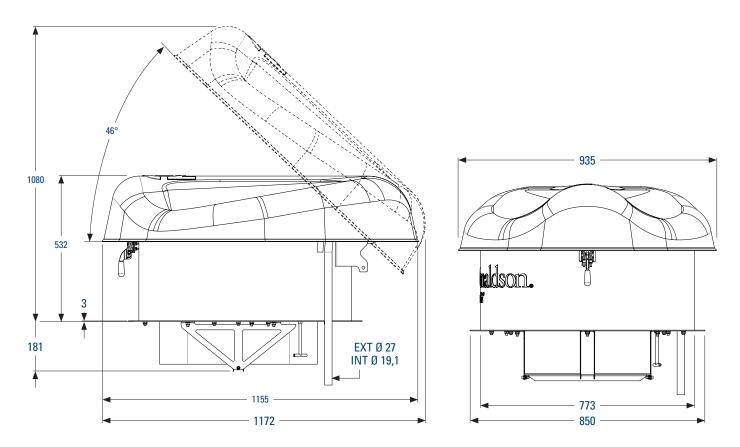

PRODUCT	DESCRIPTION	PART NUMBER
Silo Venting Unit	Silo Venting Unit (SVU) + 2 PowerCore® CP UWSB filter packs	FAAM04945
PowerCore® CP filter packs	Ultra-Web Spunbond (UWSB) Ultra-Web Antistatic (UWAS)	2626460 P032643



### **Industry-Leading Technology**

- Advanced filtration technology for optimal performance
- Reduced energy consumption and cost of ownership
- Advanced design and testing capabilities

### The Most Filters and Parts

- For every brand and style of collector
- Wide range of filtration media for any application
- 90,000 filters and parts in stock and ready to ship

### **Unparalleled Support**

- Live technical specialists
- Comprehensive pre- and post-sale support
- 40 manufacturing plants and 14 distribution centers worldwide

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. Call Donaldson Torit at 800-365-1331.

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc. Minneapolis, MN

donaldsontorit.com • shop.donaldson.com

### **North America**

Email: donaldsontorit@donaldson.com Phone: (USA): +1-800-365-1331 • (MX): +1-800-343-36-39

### Australasia

Email: marketing.australia@donaldson.com Phone: +61-2-4350-2000 Toll Free: (AU) +1800-345-837 • (NZ) +0800-743-387

### Phone: +32-16-38-3811

Email: info.difs@donaldson.com

Email: IAF-europe@donaldson.com

Email: info.cn@donaldson.com

Donaldson Europe B.V.B.A.

Phone: +86-400-820-1038

Phone: +91-124-4807-400 • +18001035018

Email: jp-ndl.ifsweb@donaldson.com Phone: +81-42-540-4112

Email: iaf-kr@donaldson.com Phone: +82-2-517-3333

Email: IndustrialAir@donaldson.com Phone: +52-449-300-2442

### South Africa

Email: SAMarketing@donaldson.com Phone: +27-11-997-6000

Fmail: IAFSFA@donaldson.com Phone: +65-6311-7373

F118016NA ENG (3/21) PowerCore Silo Venting Collectors - SVU Series ©2020-2021 Donaldson Company, Inc. Donaldson, Torit, PowerCore, and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners